


SCHMIDT BENDER

5-25x56 PMII/LP/MTC/LT

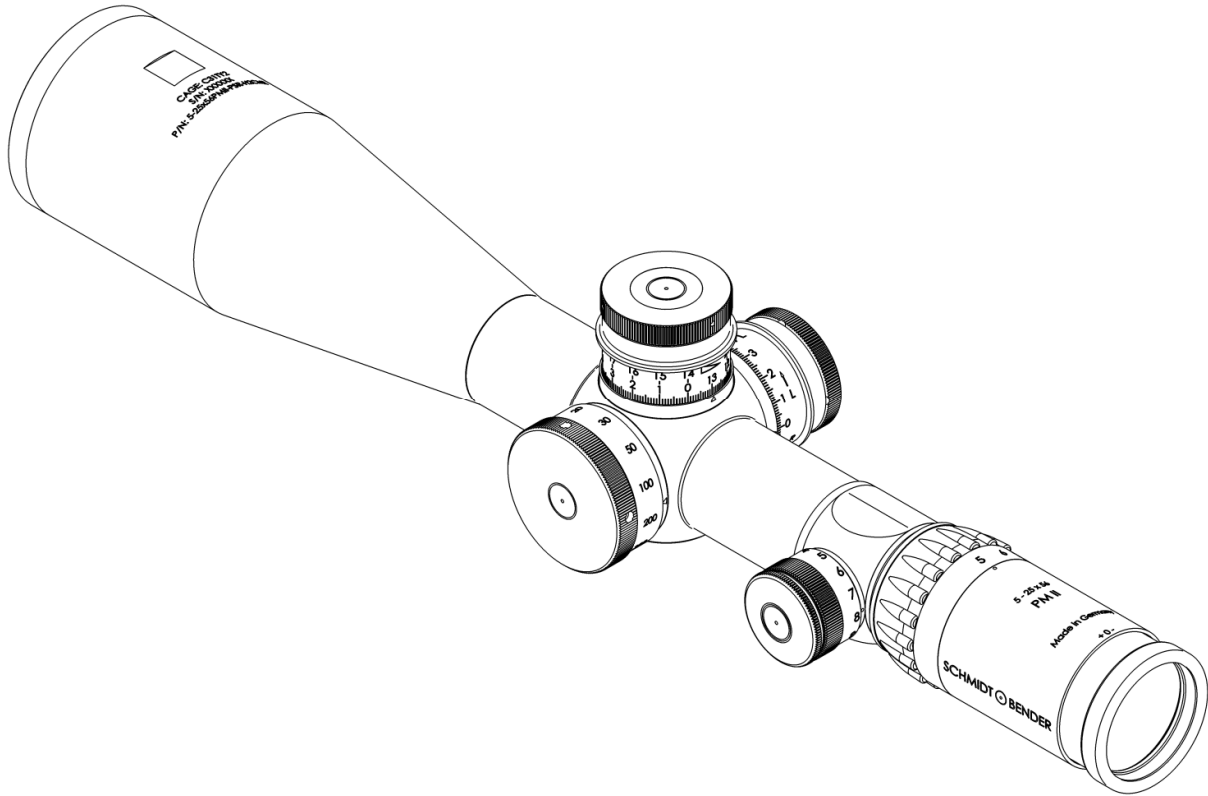

1. Scope description	3
1.1 Introduction.....	3
1.1 Safety instructions.....	3
2. Technical data	3
2.1 General data	3
2.2 Dimensions	4
3. Accessories / Scope of supply	4
4. Operating instructions	5
4.1 Adjusting the image focus with the diopter adjustment of the eyepiece	5
4.2 Parallax adjustment	6
4.3 Using the illumination control.....	6
4.4 Changing the battery	7
4.5 Using the scope covers.....	7
4.6 Using the sun shade	7
5. Correction of the point of impact	8
5.1 Using the MTC LT Turrets	8
5.2 Preliminary adjusting and fine adjusting when sighting in.....	8
5.3 Elevation adjustment.....	9
5.4 Windage adjustment.....	10
6. Maintenance	11
6.1 Storage temperature	11
7. Warranty certificate	11

1. Scope description

1.1 Introduction

The Schmidt & Bender PM II series scopes are designed to meet the unique challenges of high precision shooting. Their quality and function make it possible to achieve exceptional shooting results as well as to fulfill the critical and demanding needs of official, law enforcement and tactical applications. Strict observation of the following operating instructions is prerequisite for successful long-term use.

1.2 Safety instructions



Never look into the sun or into laser light with the scope. This may cause serious eye injuries. Do not tamper with the scope. Any repairs beyond the maintenance described in the maintenance manual should only be performed by Schmidt & Bender or by other specialists authorized by Schmidt & Bender. Protect the scope against shocks beyond normal use.



Avoid unnecessary long exposure of the scope to direct sunlight; intense and excessive sun radiation will cause extremely high temperatures inside the tube which may be detrimental to the scope.




The firearm and the scope must be properly mounted by a qualified specialist. Perfect mounting is an essential requirement for maximum accuracy and efficient functioning of the firearm and the scope. Be sure to assume the proper firing position and keep a correct eye relief in order to obtain an optimal full field of view and to avoid any injuries due to the recoil of the weapon.

2. Technical data

2.1 General data

• Magnification	-	5x – 25x	
• Objective lens diameter	-	56	(mm)
• Field of view	-	5,3 – 1,5	(m/100m)
• Exit pupil	-	10,95 – 2,28	(mm)
• Eye relief distance	-	90	(mm)
• Twilight factor	-	14,1 – 37,4	
• Transmission	-	90	(%)
• Diopter adjustment	-	+2 bis -3	(dptr)
• Parallax adjustment	-	10 - ∞	(m)
• Weight	-	1130	(g)

2.2 Dimensions

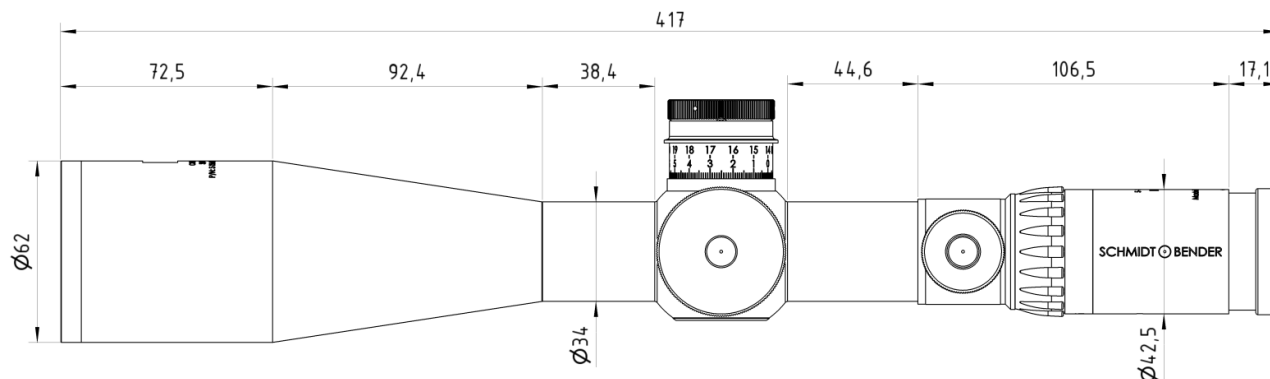


Illustr. 1: Dimensions of the Scope in mm

3. Accessories / Scope of supply

- Butler Creek or Bikini Cap for objective and ocular
- Sun Shade
- Allen key


4. Operating instructions

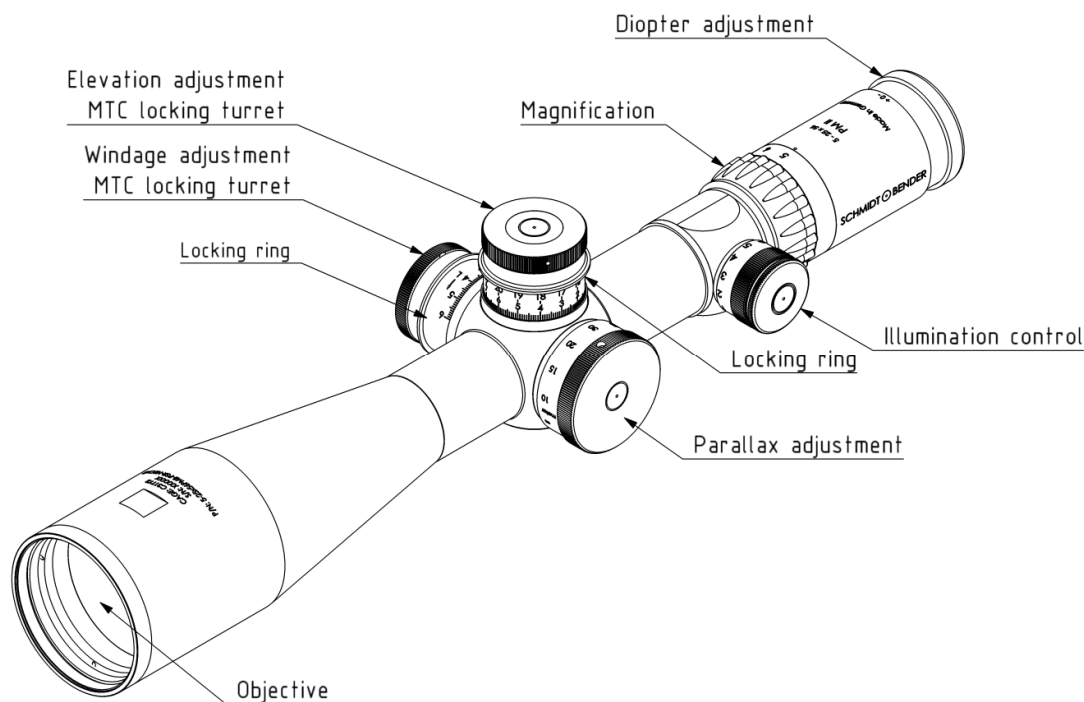

Illustr. 2: Scope Controls

4.1 Adjusting the image focus with the diopter adjustment of the eyepiece

The eyepiece provides the adjustment of the image focus to the individual eye diopter. Set the scope to the highest magnification. Rotate the eyepiece counterclockwise until it stops. Rotate the eyepiece clockwise until you see a sharp image of the reticle.

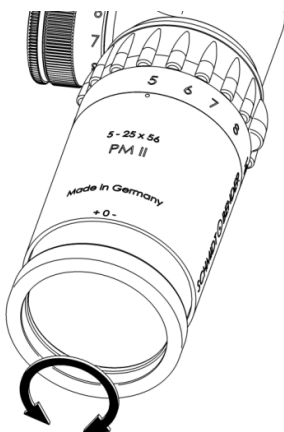


Illustr. 3: Diopter Adjustment

4.2 Parallax adjustment

The 5-25x56 PMII scope provides parallax compensation with an easily operable setting wheel positioned as a third turret opposite the windage adjustment. With this turret the shooter may easily focus targets at any distance without having to interrupt his target acquisition.

The parallax adjustment turret is engraved with distance markings. If the distance to the target is known rotate the turret so that the corresponding distance marking lines up with the index mark on the saddle.

If the distance to the target is not known set the scope to the highest magnification and then move the adjustment ring of the parallax compensation in the direction of the estimated distance until you obtain a focused image. Now the parallax has been properly adjusted and you may also read the distance on the turret.

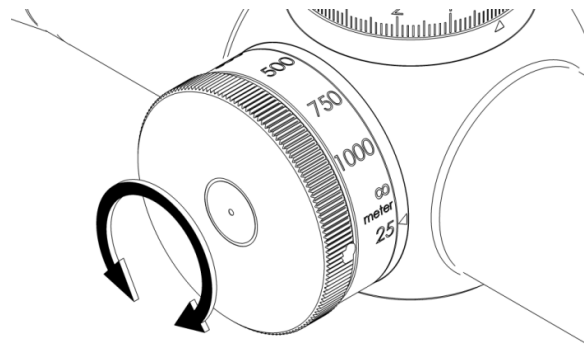


Illustr. 4: Parallax Adjustment

4.3 Using the illumination control

The illuminated reticle is designed to help identifying the correct aiming point on a dark target and/or in poor light conditions.

First, set the intensity of the illuminated reticle to the respective light conditions. To do this the illumination control may be turned from -0- toward position -11 until a setting is achieved where the illuminated portion of the reticle is just bright enough to be picked up by the eye without glaring. If possible, this adjustment should be performed under quiet conditions prior to the actual shooting. (see Illustr. 5)


If the illumination is not switched off by the shooter after use, illumination control electronics automatically switch off the illumination after 6 hours.

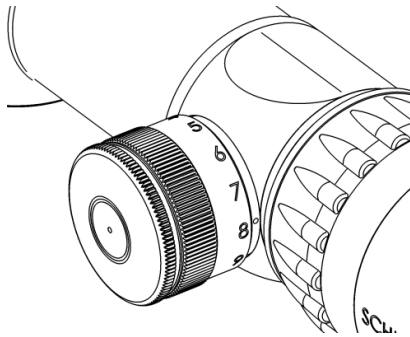

Illustr. 5: Illumination Control

4.4 Changing the battery

To replace the battery screw off the battery cap and remove the old battery. Please discard the used battery in an ecologically compatible way! Place the new battery (coin cell CR 2032/3V) with the „+“ facing up into the battery compartment. Do only change the battery in a dry environment. Battery service life is at least 100 hours at the highest intensity (see Illustr. 6).

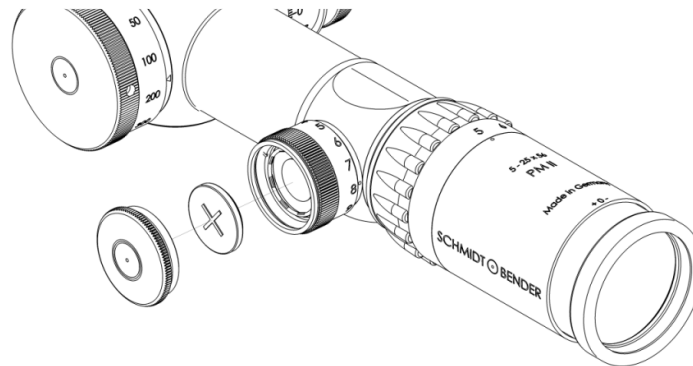

Illustr. 6: Battery Replacement

4.5 Using the scope covers

To protect the scope and its lenses against adverse environmental conditions like sand, dust, rain, snow, etc., the protective flip-up caps of objective and eyepiece should be closed after every use of the scope. Before shooting, make sure that the caps are open.

4.6 Using the Anti-Reflective Device ARD

The ARD prevents the reflection of light sources in the objective lens which might reveal the location of the shooter. It should be considered that the ARD decreases the light output of the scope, which especially yields in a lower performance in low light conditions.

5. Correction of the point of impact


5.1 Using the MTC LT Turrets

The MTC LT turrets include the following features:

- Double turn (elevation)
- MTC (more tactile click)
- Zero stop (elevation and windage)
- Locking function (elevation and windage)

The „double turn“ elevation turret provides a fine click adjustment value in addition to a large elevation adjustment . When the turret is rotated into the second revolution a small cylinder pops up on top of the turret which indicates to the user that the second turret revolution has been reached. Additionally, the zero stop function supports the quick adjustment to the zero position. The zero stop function is determined by an end stop. The MTC elevation turret has an audible "clunk" on every 10th click.

The elevation turret includes a locking function which prevents the inadvertent adjustment of the turret. To lock the turret, the outer flange with the engraving must be pushed down in direction of the scope tube until "LOCKED" appears on the turret. **Error! Reference source not found.** To unlock the turret, the outer flange must be pulled up until the "LOCKED" indicator completely disappears

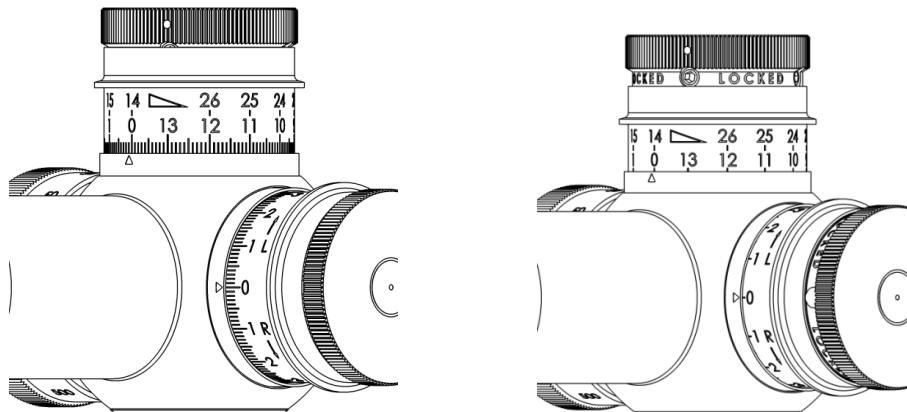


Illustr. 7: Locking Function of the Turrets

5.2 Preliminary adjusting and fine adjusting when sighting in

When sighting in the scope for the first time, or re-sighting the scope due to service or repair, a test shooting for zeroing the scope must be performed on a 100m distance. Therefore, make sure that the parallax is set to the correct value of 100m and that both elevation and windage are set to "0". The double turn turret must be set to the first revolution (center plunger down).

The centering of the shot pattern is then performed according to paragraph 5.3 and 5.4.


Lock both turrets, elevation and windage, then unscrew the two Allen headscrews in the outside diameter in line with the "LOCKED" text using an Allen key.

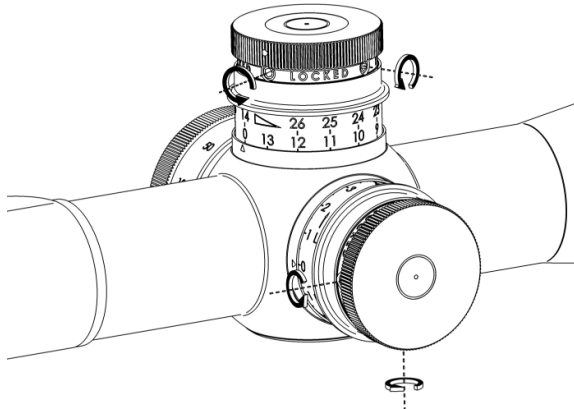

Illustr. 8

Now unlock the turrets by pulling up the outer bushing with the engraving and turn both turrets until the engraved "0" is indicated by the triangle on the saddle. Now, lock the turrets by pushing down the outer bushing with the engraving and tighten the two Allen head screws with an Allen key.


- ① The turret caps are secured by an additional screw and should **NEVER** be removed.
- ① The clicks of the turrets can be felt and heard when the screws are loosened. This has no impact on the process of zeroing as the thread piece does not move while the setscrews are loose.

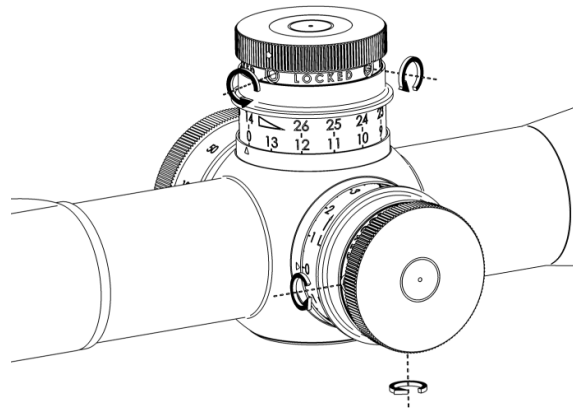

Illustr. 8: Zeroing of the scope – Unscrewing the Allen Head Screws

5.3 Elevation adjustment


The point of impact is moved by 1cm on 100m with every click. A too low point of impact is corrected by rotating the elevation turret counter-clockwise (see Illustr. 9), a too high point of impact by rotating the elevation turret clockwise.

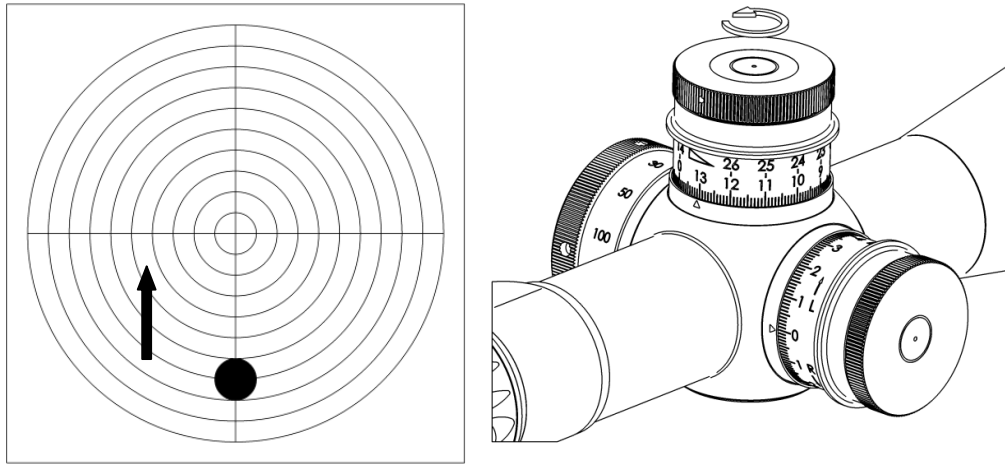

Illustr. 9: Elevation Adjustment

5.4 Windage adjustment

The point of impact is moved by 1cm on 100m with every click. A too far left point of impact is corrected by rotating the windage turret counter-clockwise, a too far right point of impact is corrected by rotating the turret clockwise (see Illustr. 10).

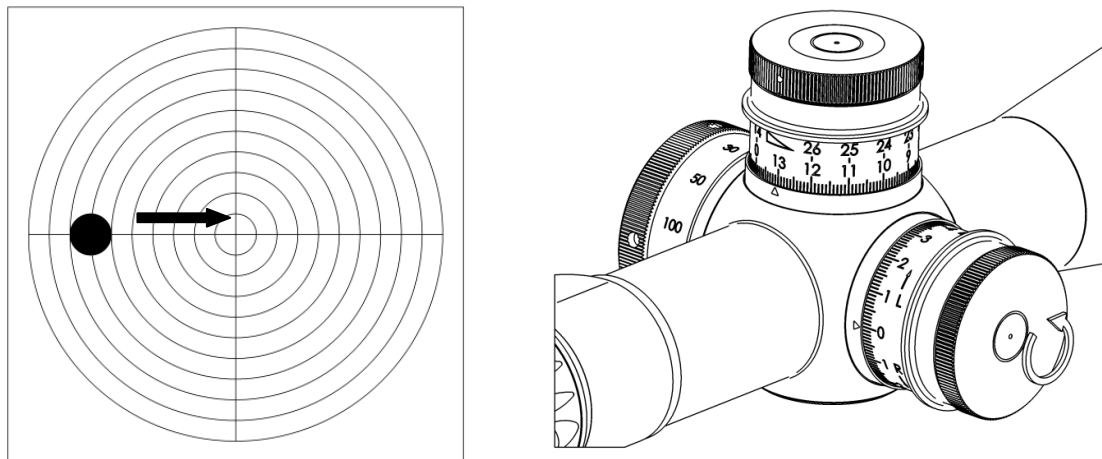

Illustr. 10: Windage Adjustment

6. Maintenance

Schmidt & Bender PM II scopes do not require any special maintenance. All metal parts have a hard anodized surface that is extremely scratch-resistant and easy to care for.



For cleaning outer surfaces, use a clean and, if necessary, a slightly damp cloth.



For cleaning the optics use the included Schmidt & Bender cleaning kit ?? Are cleaning kits provided with each scope?. Before wiping the optic's surfaces, use a dry brush to remove coarse dirt or dust particles. Slight impurities may then be wiped off using an optic's cleaning cloth. Breathe onto the optic's surfaces before cleaning them, this helps with the cleaning process. Excessive dirt may be removed using the cleaning liquid included in the cleaning kit.



Avoid dry rubbing on the outside optical surfaces, this may harm the precious coatings.

6.1 Storage temperature



The approved temperature range for the storage of the scope is from -55°C to 70°C.

7. Warranty certificate

We hereby certify that our Quality Management System has been approved by Unternehmensgruppe TUV Rheinland Berlin Brandenburg to the following Quality Management Standard: The TUV Cert Certification Body of TUV Anlagentechnik GmbH (Unternehmensgruppe TUV Rheinland Berlin Brandenburg) certifies in accordance with TUV Cert procedures that Schmidt & Bender GmbH & Co. KG, Am Grossacker 42, D- 35444 Biebertal has established and applies a quality management system for the design, production sales and service of fine mechanical optical instruments. Main product telescopic sights. Proof has been furnished that the requirements according to ISO 9001:2008 – # Registration No. 01 100 67280 - are fulfilled. All parts have been thoroughly inspected in accordance with the afore-mentioned Quality Management System and correspond to the requirements of the specifications, drawings, test procedures and standards in all respects.

Guarantee clause:

Official legal guarantee period of 2 years (according to the directive of EU)

Contact:

Schmidt & Bender GmbH & Co. KG • Am Grossacker 42 • D-35444 Biebertal • Germany
Tel. +49 (0) 64 09-81 15-0 • Fax +49 (0) 64 09-81 15-11
info@schmidt-bender.de • www.schmidt-bender.de